




GENUINE ACCESSORIES
INSTALLATION INSTRUCTIONS

PART NUMBER:
0000-8T-R13


Rear Bumper Guard

APPLICABLE MODELS:
2013 ≥ MAZDA CX5

PACKAGE CONTENTS:

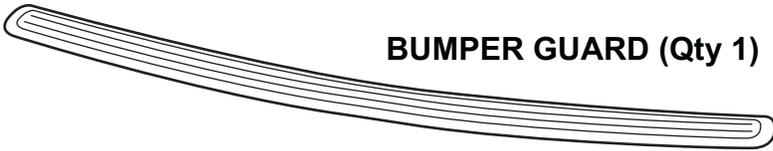

BUMPER GUARD (Qty 1)



TEMPLATES (Qty 2)



**ALCOHOL WIPE
(Qty 1)**

TOOLS REQUIRED:



SCISSORS



SOFT LINT FREE CLOTH



RUBBER ROLLER



MASKING TAPE


⚠ CAUTION: Make sure to follow the instructions carefully to ensure proper installation.

0. Before Installation:

- A. Read entire installation instruction before proceeding.
- B. Vehicle must be at room temperature. This is recommended to allow the tape to adhere in temperatures over 50 degrees F for at least 30 minutes.
- C. Clean mud, dirt and salt from installation area.
- D. Allow vehicle to dry.


1. Prepare Bumper:

- A. Open the lift gate.
- B. Carefully clean the horizontal surfaces where the bumper guard will attach with alcohol. Allow to air-dry.

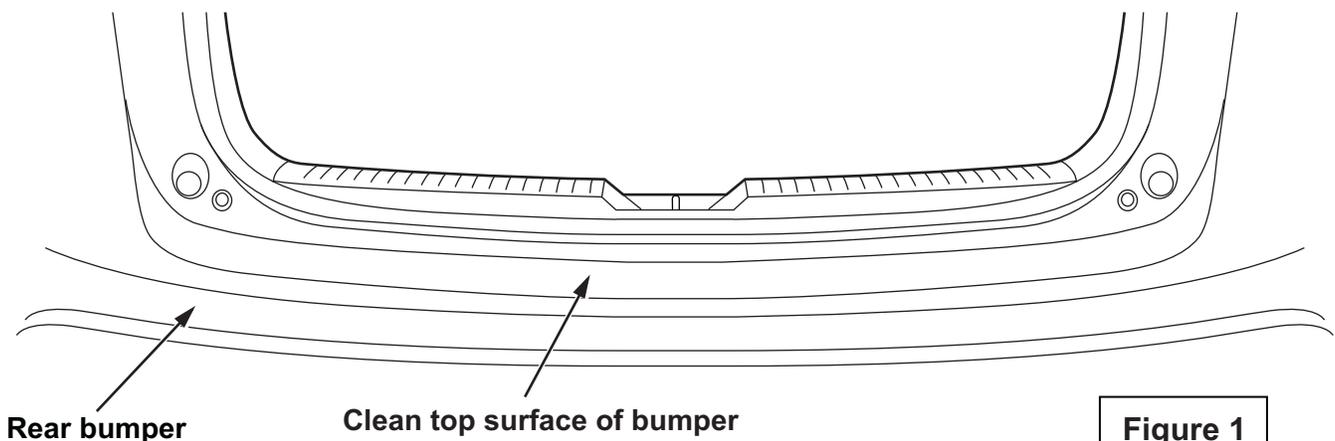

2. Bumper Guard Application

A. Position right and left alignment templates as shown. Templates will need to be folded 90 degrees to fit at the crease. Tape into position. [Figure 2]

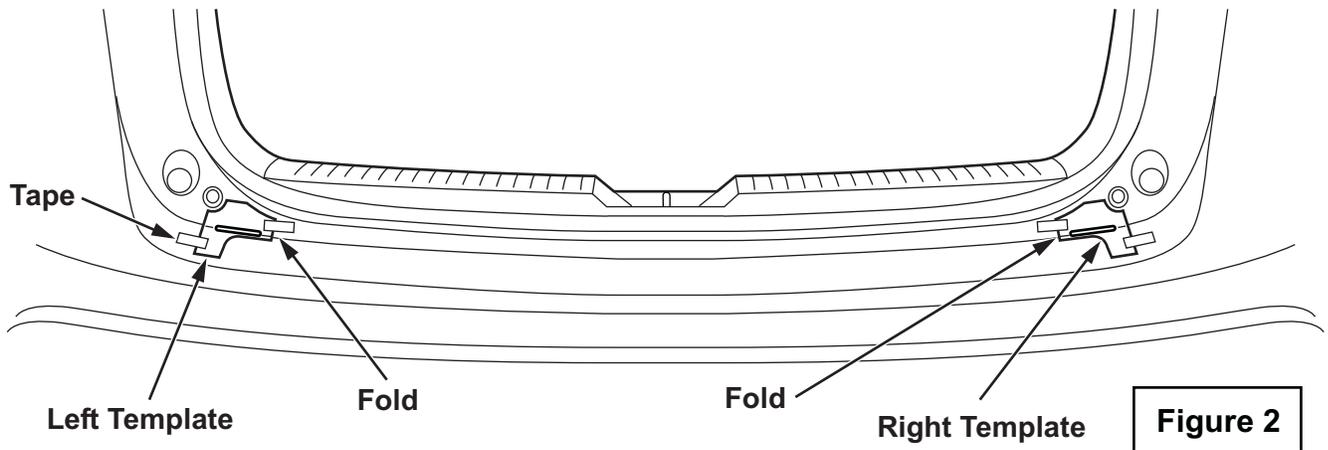


B. **NOTE: Failure to properly follow this step could result in a poor fit. You should have 4 small pieces of masking tape ready to hold the flags for this step.**


Test fit the bumper guard by aligning the part against the templates. After determining the best fit, part quality and no gaps in excess of 2mm, remove the bumper guard from the vehicle. Peel a starting edge on all tape strips and flag with masking tape.

Carefully position the bumper guard in alignment with the templates for best fit.

Pull the two center flags to remove tape liners A and B. Push the center of the bumper guard to fully contact the surface of the bumper. The bumper guard will hold itself in this position for the final tape adhesion in the next step.

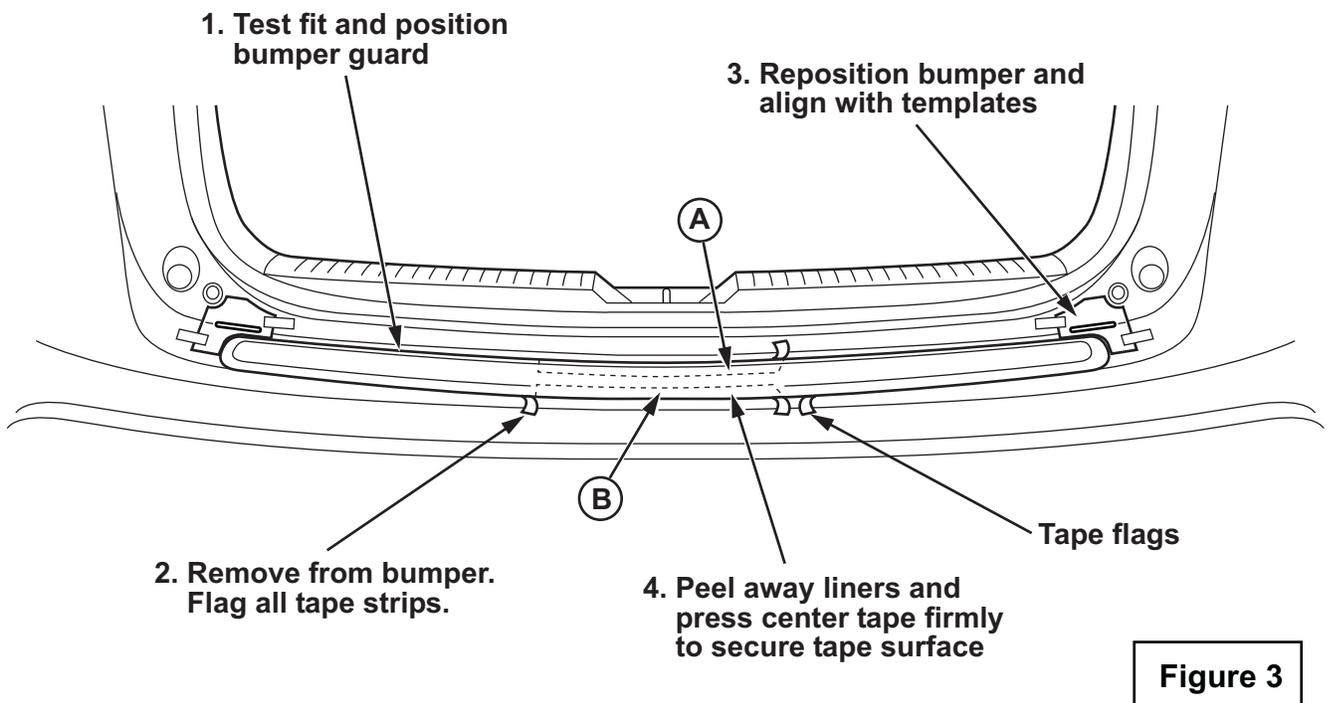


C. Carefully lift the front edge of the guard just enough to allow removal of the remaining tape liners. Pull the liner from the center outward, applying upward pressure on guard if needed. Use care to not pull guard away from the rear of the bumper while performing this step. [Figure 4]

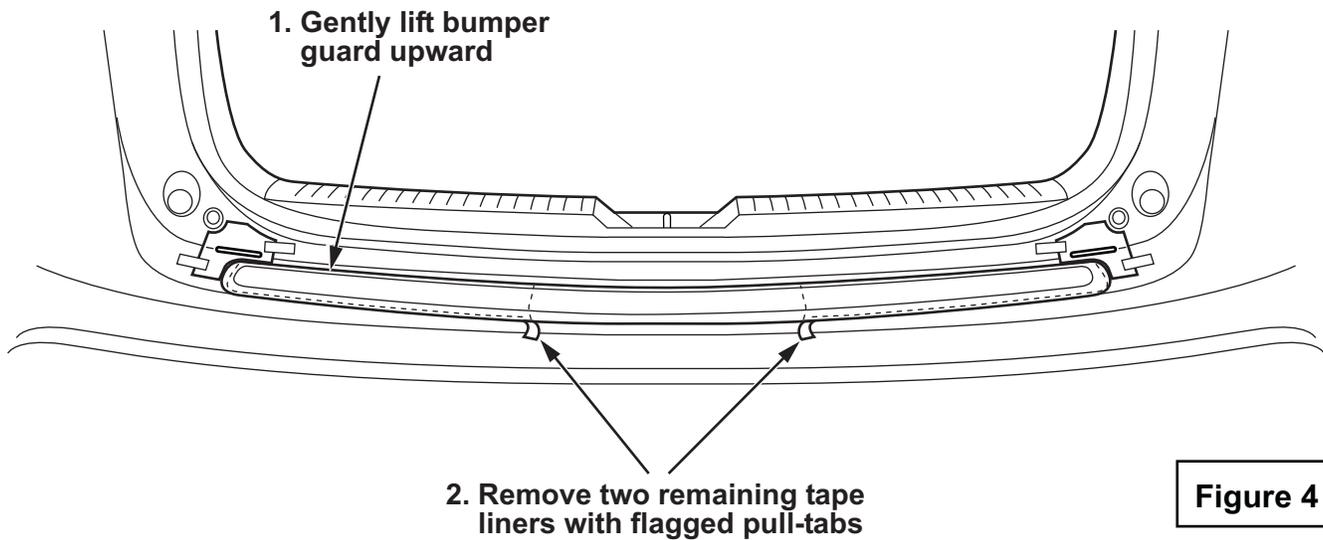

D. Remove left and right templates. Using a roller, press the entire guard firmly against the bumper from the center-out. [Figure 5]

E. It is recommended that the tape adhesive be allowed to cure in temperatures over 50 degrees F for at least 30 minutes.

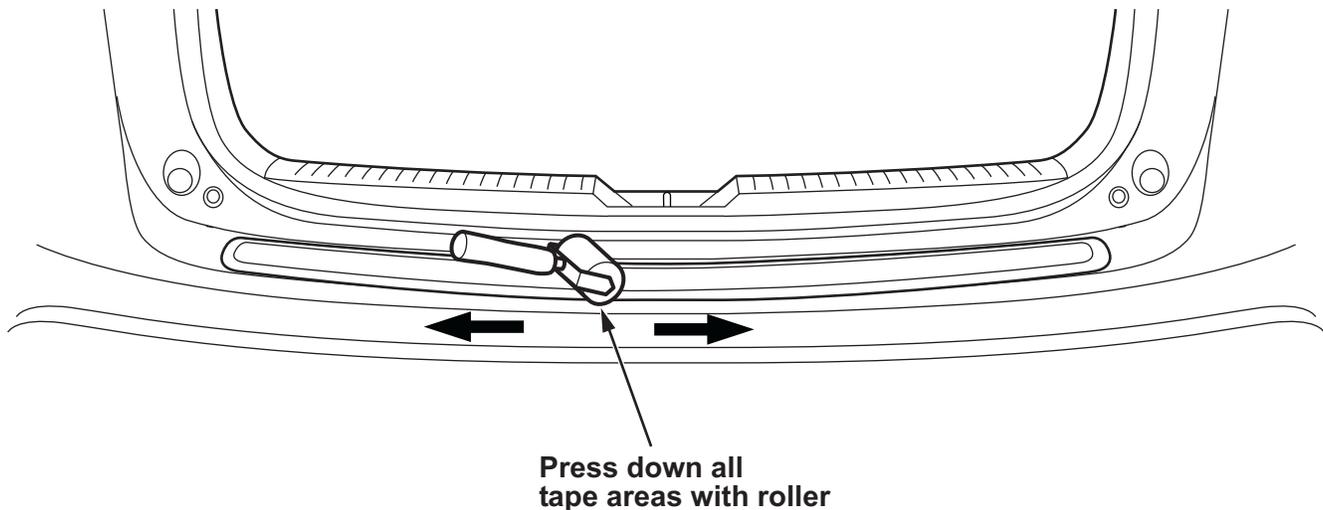

F. Clean installation area and perform inspections.
NOTE: Do not wash vehicle through an automatic car wash for at least 24 hours.

Figure 5

Installation Inspection Sheet

[To be used by installation workshop]

Mazda CX5	Rear Bumper Guard
	2013>, All models

Inspection items after installation

Inspect the installed parts per the items listed below.

Section to be inspected	Inspection item (circle)		
	Gap & fit	Scratches/stains	Tape residue/fingerprints
Rear Bumper Guard (Steel)	○	○	○
Rear Bumper		○	○
Verify that all 4 tape liners are accounted for after installation			

Date		(year/month/day)			
VIN No.					
Approved		Checked		Prepared	

❖ Retention period of this sheet: 12 months